


$$\begin{aligned} C_{res1} &:= 4700 \cdot 10^{-12} \\ C_{res2} &:= 1000 \cdot 10^{-12} \\ C_{res3} &:= 22000 \cdot 10^{-12} \\ CDV1 &:= 100 \cdot 10^{-12} \\ CDV2 &:= 470 \cdot 10^{-12} \end{aligned}$$

$$\begin{aligned} Vdd &:= 5 \quad \text{Supply Voltage} \\ Vss &:= 0 \quad \text{Ground} \\ RSER &:= 18 \\ RAD &:= 3 \\ IDDon &:= 0.25 \end{aligned}$$

$$\begin{aligned} WDmil &:= 0.010 \text{ in} \\ ODmil &:= 0.011 \text{ in} \\ RW &:= \frac{106 \Omega}{1000 \text{ ft}} \end{aligned}$$

30 AWG Magnet Wire, coated

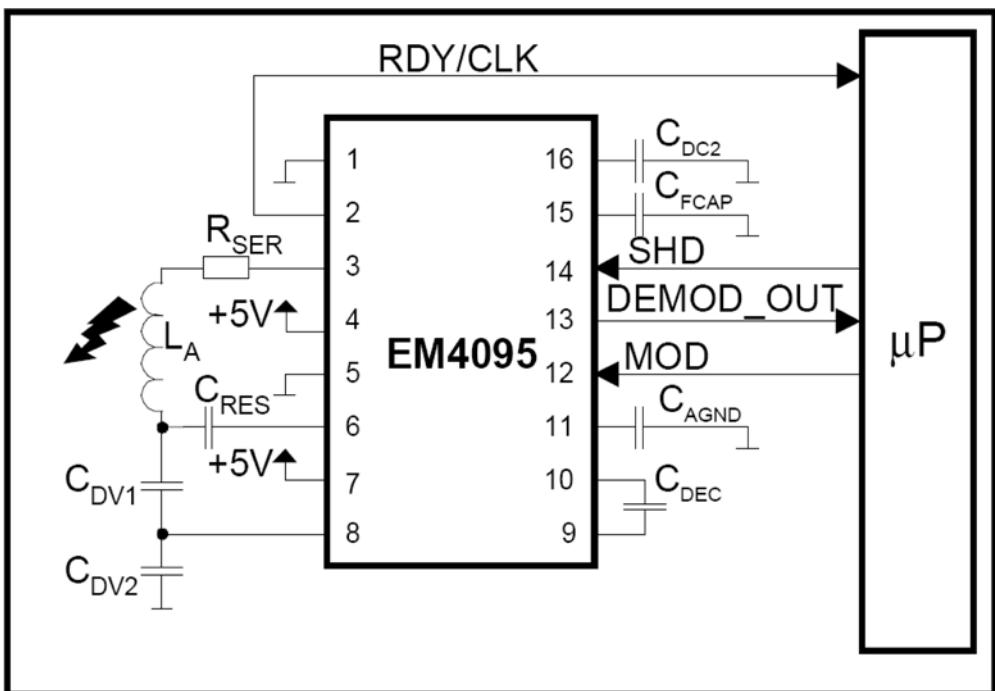

$$C_{Vdd} := 100\text{nF} \quad C_{DVdd} := 100\text{nF} \quad C_{DC2} := 6.8\text{nF} \quad C_{FCAP} := 10\text{nF} \quad C_{DEC} := 100\text{nF} \quad C_{AGND} := 100..220\text{nF}$$

$$WD := WDmil \cdot 2.54 \quad OD := ODmil \cdot 2.54$$

$$a := 3.6 \text{ cm} \quad Nt := 20 \text{ turns}$$

$$b := OD \cdot Nt$$

$$ri := a - \frac{b}{2} \quad ro := a + \frac{b}{2}$$

$$\text{Length} := \frac{\pi \cdot (ro^2 - ri^2)}{OD} \cdot \frac{1}{100}$$

$$\text{Resistance} := \text{Length} \cdot \frac{1000}{25.4 \cdot 12} \cdot RW$$

$$L_{spiro} := \frac{0.3937 \cdot (a \cdot Nt)^2}{(8 \cdot a) + (11 \cdot b)} \cdot 10^{-6}$$

$$C_{res} := C_{res1} + C_{res2} + C_{res3}$$

$$Co := C_{res} + \frac{CDV1 \cdot CDV2}{CDV1 + CDV2}$$

$$f_0 := \frac{1}{2 \cdot \pi \cdot \sqrt{L_{spiro} \cdot Co}}$$

Operating Frequency

$$f_0 = 124946$$

$$Q := \frac{2 \cdot \pi \cdot f_0 \cdot L_{spiro}}{\text{Resistance}}$$

Theoretical Q

$$Q = 29$$

$$I_{ANT} := \frac{4}{\pi} \cdot \frac{Vdd - Vss}{\text{Resistance} + RSER + 2 \cdot RAD} \quad \text{Antenna coil current (<250mA)}$$

$$I_{ANT} = 0.249$$

$$IRMS := \frac{I_{ANT}}{\sqrt{2}}$$

RMS current (A)

$$IRMS = 0.176$$

$$VANT_{pp} := \frac{I_{ANT}}{\pi \cdot f_0 \cdot Co}$$

Peak to peak Antenna Voltage

$$VANT_{pp} = 22.827$$

$$VDMOD\_IN_{pp} := VANT_{pp} \cdot \frac{CDV1}{CDV1 + CDV2}$$

$$VDMOD\_IN_{pp} = 4.005$$

$$P := 2 \cdot IRMS^2 \cdot RAD + IDDon \cdot (Vdd - Vss)$$

$$P = 1.436$$


#### INDUCTANCE OF SPIRAL WOUND COIL WITH SINGLE LAYER

The inductance of a spiral inductor is calculated by:

#### EQUATION 25:

$$L = \frac{(0.3937)(aN)^2}{8a + 11b} \quad (\mu H)$$

FIGURE 9: A SPIRAL COIL



where:

$$a = (r_i + r_o)/2$$

$$b = r_o - r_i$$

$$r_i = \text{Inner radius of the spiral}$$

$$r_o = \text{Outer radius of the spiral}$$

Note: All dimensions are in cm