


8CH, 12 BIT A/D  
 WITH SPI INTERFACE  
 604-00062  
 MCP3202

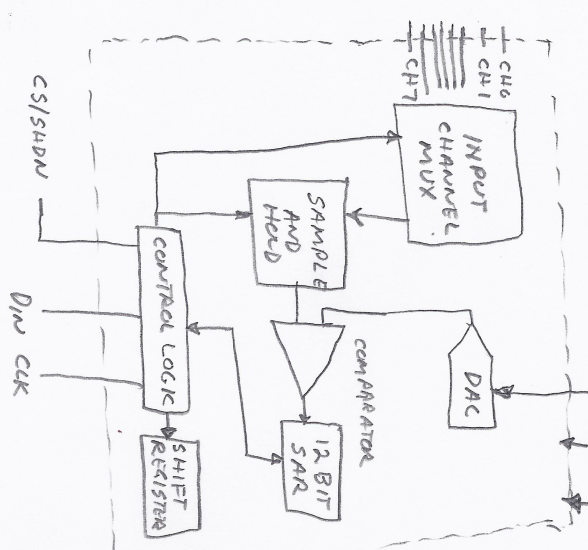

- Q1. How does LM324 connect to 12 BIT A/D?
- Q2. Am I missing a filter between sensor & A/D?
- Q3. MEASUREMENT SYSTEMS INSTRUMENTATION AMP IS DIFFERENT THAN THE ONE MICROCHIP SUGGESTS @ WWW.MICROCHIP.COM/DOWNLOADS/EN/APPNOTES/00695a.PDF. (PAGE 80-12, 106-05)
- Q4. IS THERE SAMPLE CODE AND WIRE HOOK UPS TO CONVERT THE 12 BIT A/D TO THE BASIC STAMP 2 EEPROM TO STORE AND DISPLAY DATA?