

ADJUSTABLE FREQUENCY AC DRIVES



NFX9000 Series Starts at \$192



- **V/Hz Control:** Provides 150% Starting Torque and Advanced Low Speed Control
- **Easy to Understand Keypad**
- **RS485 Serial Communication Port**
- **Single-Phase or 3-Phase Input Capability on 115/240 Vac Rated Units**

Cutler-Hammer® NFX9000 adjustable frequency AC Drives from Eaton's electrical business are designed to provide adjustable speed control of 3-phase motors. These microprocessor-based drives have standard features that can be programmed to tailor the drive's performance to suit a wide variety of application requirements. The NFX9000 volts-per-hertz product line utilizes a 32-bit microprocessor and insulated gate bipolar transistor (IGBTs) which provides quiet motor operation, high motor efficiency and smooth low speed performance. The size and simplicity of the NFX9000 make it ideal for hassle-free installation where size is a primary concern.

Models rated at 240V, single- or 3-phase, 50/60 Hz are available in sizes ranging from ¼ to 2 hp. Models rated at 115V, single-phase, 50/60 Hz are available in the ¼ to ½ hp size range. The standard drive includes a digital display as well as operating and programming keys on a removable keypad. The display provides drive monitoring and diagnostic information. The keys are utilized for digital adjustment and programming of the drive plus operator control. Separate terminal blocks for control and power wiring are provided for customer connections. The drives feature RS485 serial communications.



NFXF50A0-1, \$192, shown smaller than actual size.

SPECIFICATIONS

OUTPUT RATINGS

Horsepower: 90 to 132V, ¼ to ½ hp, 200 to 240V, ½ to 2 hp
Frequency Range: 0.1 to 400 Hz
Overload Rating: 150% for 60 sec
Frequency Resolution: Digital, 0.1 Hz
Frequency Accuracy:
 Digital: ± 0.01% of max frequency
 Analog: ± 0.2% of max frequency
Undervoltage Carryover Limit: 0.3 to 25 sec
MOTOR PERFORMANCE
Motor Control: V/Hz
Constant Torque: Standard
Speed Regulation: 0.5% of base speed

INPUT POWER

Voltage: 50/60 Hz, ±3 Hz
 100 to 120V: -10% +10%/1-phase
 200 to 240V: -10% +5%/1-phase
 200 to 240V: -10% +5%/3-phase

Displacement Power Factor:


Better than 0.95
Efficiency: Typically greater than 95%

DESIGN TYPE

Microprocessor: 32-bit
Converter Type: Diode
Inverter Type: Insulated Gate Bipolar Transistor
Waveform: PWM V/Hz

ENVIRONMENT

Operating Temperature: -10 to 40°C (14 to 104°F)
Humidity: 20 to 90% non-condensing
Maximum Elevation: 1000 m (3281')

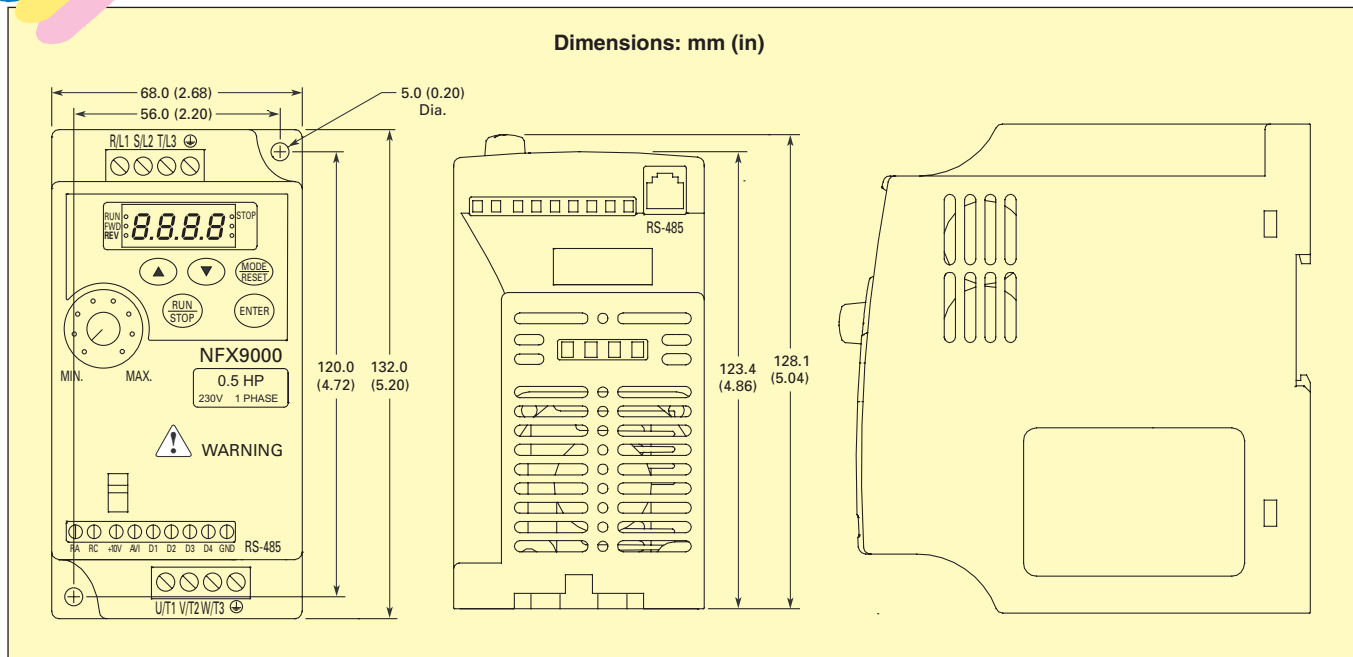

CODES AND STANDARDS

NEMA, IEEE, NEC: Design standards, UL listed, cUL listed, CE marked
Standard Enclosure: Protected chassis (IP20)

PROTECTIVE FEATURES

Ground Fault: Standard
Overload Protection: Standard
Overcurrent: Standard
Overvoltage: Standard
Undervoltage: Standard
Overtemperature: Standard
Overload Limit: Standard

SET UP ADJUSTMENTS, PERFORMANCE FEATURES, OPERATOR CONTROL AND EXTERNAL INTERFACE

Keypad:
Alphanumeric Display: Standard, 1 x 4 character
Digital Indicators: RUN/STOP and FORWARD/REVERSE
Diagnostics: Last 3 trips with cause

LED Status Indicators: 4; RUN/STOP and FORWARD/REVERSE
Operator Functions: RUN/STOP, speed control (digital or potentiometer), RESET, MODE keys and ENTER

I/O TERMINAL BLOCK

Analog Inputs: 1 Input, 0 to 10 Vdc, 4 to 20 mA
Potentiometer: 1 to 2K Ω
Analog Voltage: Nominal 10 Vdc, 10K Ω input impedance
Analog Current: Nominal 4 to 20 mA, 250 Ω
Digital Inputs: 4 programmable inputs
Digital Outputs: 1 form A relay contact

PROGRAMMABLE PARAMETERS

Out of the Box: Factory settings loaded for quick start-up
Acceleration and Deceleration: 2 separately, adjustable linear or S curve times, 0.1 to 600 sec
DC Injection Braking:
External Fault: Terminal input
Jog: Terminal input

Fault Reset: STOP/RESET or terminal input
I/O: NO/NC selectable
Jump Frequencies: 3, with adjustable width
Parameter Security: Programmable software lock
Preset Speeds: 2 preset speeds
Reversing: Keypad or terminal
Speed Setting: Keypad, terminal or pot
RUN/STOP Control: Keypad or terminal
Stop Modes: Decel, coast or DC injection
RELIABILITY
Pretested Components: Standard
Surface Mount Technology: Standard, PCBs
Computerized Testing: Standard
Final Test with Full Load: Standard
Eaton's Cutler-Hammer Engineering Systems and Service: National network of AF drive specialist

To Order (Specify Model Number)

STOCKED FOR IMMEDIATE DELIVERY!

MODEL NO.	PRICE	DESCRIPTION	INPUT AMPERE	AMP RATING
115 VOLT				
NFXF50A0-1	\$192	½ hp single phase, watt loss: 20 W	9.0	2.50
230 VOLT				
NFXF25A0-2	\$220	Micro drive 0.25 Hp 230 Vac V/Hz (open chassis), watt loss: 20 W	4.9	1.6
NFX001A0-2	300	Micro drive 1 Hp 230 Vac V/Hz (open chassis), watt loss: 38 W	9.7	4.2
NFX002A0-2	340	Micro drive 2 Hp 230 Vac V/Hz (open chasis), 3 ph, watt loss: 75 W	9.0	7.0

Comes with operator's manual.
Ordering Example: NFXF50A0-1, ½ Hp single phase, 20 W loss, \$192.



UNITED STATES

www.omega.com
1-800-TC-OMEGA
Stamford, CT.

CANADA

www.omega.ca
Laval(Quebec)
1-800-TC-OMEGA

GERMANY

www.omega.de
Deckenpfronn, Germany
0800-8266342

UNITED KINGDOM

www.omega.co.uk
Manchester, England
0800-488-488

FRANCE

www.omega.fr
Guyancourt, France
088-466-342

CZECH REPUBLIC

www.omegaeng.cz
Karviná, Czech Republic
596-311-899

BENELUX

www.omega.nl
Amstelveen, NL
0800-099-33-44



More than 100,000 Products Available!

• Temperature

Calibrators, Connectors, General Test and Measurement Instruments, Glass Bulb Thermometers, Handheld Instruments for Temperature Measurement, Ice Point References, Indicating Labels, Crayons, Cements and Lacquers, Infrared Temperature Measurement Instruments, Recorders Relative Humidity Measurement Instruments, RTD Probes, Elements and Assemblies, Temperature & Process Meters, Timers and Counters, Temperature and Process Controllers and Power Switching Devices, Thermistor Elements, Probes and Assemblies, Thermocouples Thermowells and Head and Well Assemblies, Transmitters, Wire

• Flow and Level

Air Velocity Indicators, Doppler Flowmeters, Level Measurement, Magnetic Flowmeters, Mass Flowmeters, Pitot Tubes, Pumps, Rotameters, Turbine and Paddle Wheel Flowmeters, Ultrasonic Flowmeters, Valves, Variable Area Flowmeters, Vortex Shedding Flowmeters

• pH and Conductivity

Conductivity Instrumentation, Dissolved Oxygen Instrumentation, Environmental Instrumentation, pH Electrodes and Instruments, Water and Soil Analysis Instrumentation

• Data Acquisition

Auto-Dialers and Alarm Monitoring Systems, Communication Products and Converters, Data Acquisition and Analysis Software, Data Loggers Plug-in Cards, Signal Conditioners, USB, RS232, RS485 and Parallel Port Data Acquisition Systems, Wireless Transmitters and Receivers

• Pressure, Strain and Force

Displacement Transducers, Dynamic Measurement Force Sensors, Instrumentation for Pressure and Strain Measurements, Load Cells, Pressure Gauges, Pressure Reference Section, Pressure Switches, Pressure Transducers, Proximity Transducers, Regulators, Strain Gages, Torque Transducers, Valves

• Heaters

Band Heaters, Cartridge Heaters, Circulation Heaters, Comfort Heaters, Controllers, Meters and Switching Devices, Flexible Heaters, General Test and Measurement Instruments, Heater Hook-up Wire, Heating Cable Systems, Immersion Heaters, Process Air and Duct, Heaters, Radiant Heaters, Strip Heaters, Tubular Heaters